

Rollmaxx

 SureWeld

After all, Quality does Carry Weight!

Aluminium EWP Trailers



SW2000EWP

SW2000EWP

SW2400EWP

1800 787 005

www.sureweld.com.au


Rollmaxx

Features

Zinc-plated, then powder-coated mudguards in a choice of colours.



Multiple tie-down points.

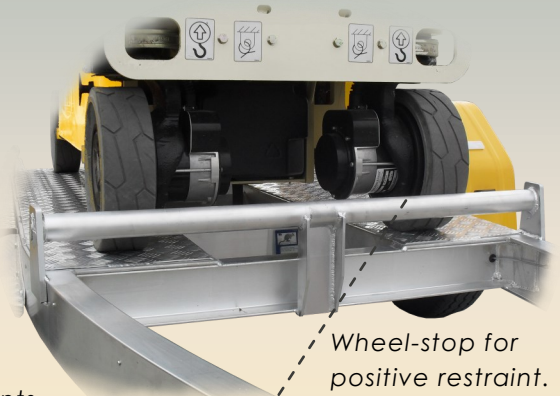


Wheel-stop for positive restraint.



All new wheels and tyres.



Electric or mechanical override brakes.

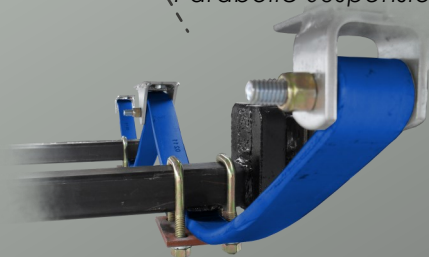

Parabolic Suspension.



Jockey stand.

Low tare weights.

Electronic breakaway system on all electric braked models.



1800 787 005

 SureWeld

After all, Quality does Carry Weight!



Beaver-tail for low clearance applications.

Hinged Aluminium Ramps.

Steel brace-retainer pins.

Aluminium deck surface.

Multi-volt LED lighting.

Sureweld Trailers demonstrate exceptional levels of refinement in structure and presentation.

Chassis, suspension and drawbar designs are passed through stringent FEA modelling and testing in addition to physical field trials.

Fine details such as working parts, wear areas and surface finishes are completed to the highest standard.

All this is coupled with the fundamental objective of achieving optimum weight saving for economical operation.

Short lead times allow operators to set up their outfit promptly and be on the road and working in the shortest possible time.

Sureweld Plant Trailers fully comply with Australian Design Regulations and are available through a national network of dealers and .

Please see overleaf for more information and specifications.

www.sureweld.com.au

SPECIFICATIONS

The following features are offered with this range of Plant Trailers:

- Independent Rubber Suspension.
- High-grade structural aluminium.
- Beaver-tail Deck.
- Choice of Mudguard colours.
- Hinged Aluminium Ramps.
- Low centre of gravity.
- Multi volt LED Lights. All Plug types available.
- All new Wheels & Tyres. 8 ply light Truck Tyres.
- Bump-stop bar for positive load restraint.

FEATURES UNIQUE TO EACH MODEL

SW2000WP

- Mechanical-override Brakes.

- Front axle Disc Brakes.

- 50mm Coupling.

- 14" steel Wheels. "Sunraysia" white.

- Ford stud pattern.

SW2400EWP

- 10" Electric Drum Brakes - All

- Electronic Break-away unit.

- 50mm Coupling.

- 14" steel Wheels. "Sunraysia" white.


- Ford stud pattern.

DIMENSIONS

Nominal dimensions in mm. Match with letters on the diagram below.

Model	Series	A	B	C	D	E	F	G	H	I	TARE	A.T.M	PAYLOAD
SW2000WP	EWP	1700	750	4000	470	205	1100	1130	1600	350	300 Kg	2000 Kg	1700 Kg
SW2400EWP	EWP	1700	750	4000	480	205	1100	1130	1600	350	370 Kg	2400 Kg	2030 Kg

NOTE: Specifications may be subject to change without notice, as part of ongoing product improvement.

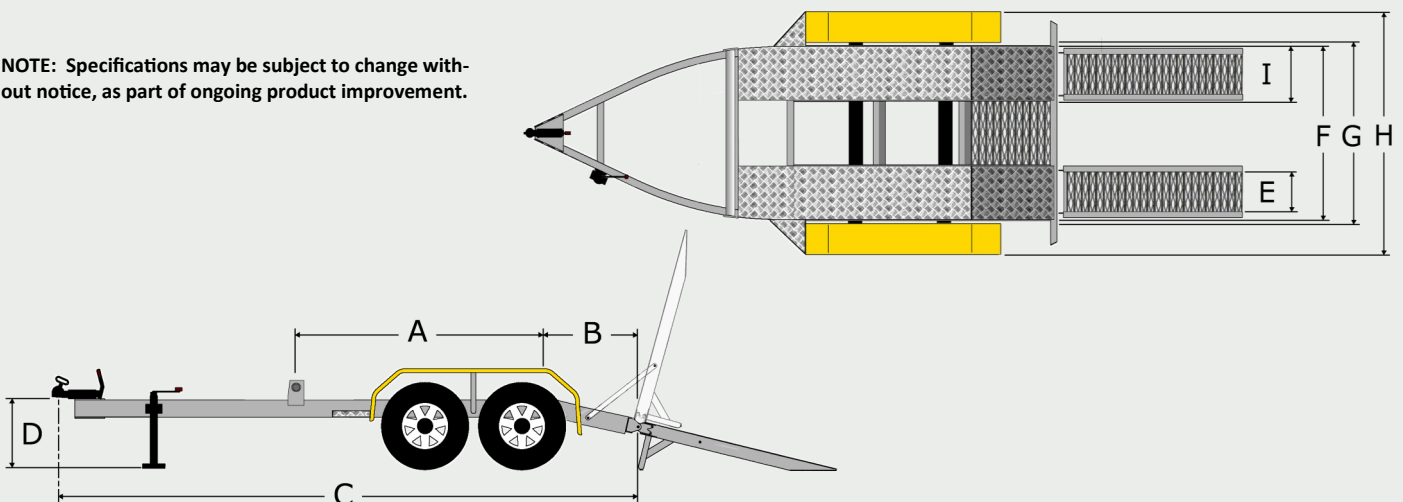

A = Deck Length. B = Beaver-tail Length. C = Trailer Length. D = Tow Hitch Height. E = Ramp Width [internal].
F = Deck Width. G = Clearance Between Guards. H = Trailer Width [external]. I = Deck Section width.